
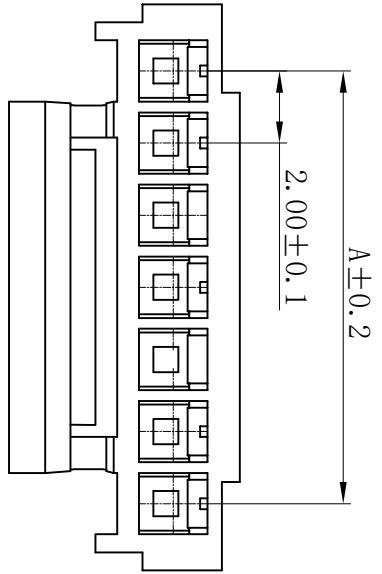


版次	日期	内容

Electrical properties

- Current rating: 3A AC\DC
- Voltage rating: 250V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20mΩ max
- Insulation resistance: 1000MΩ min
- Withstanding voltage: 1000V AC/ minute
- Material : Nylon UL94V-0(2)

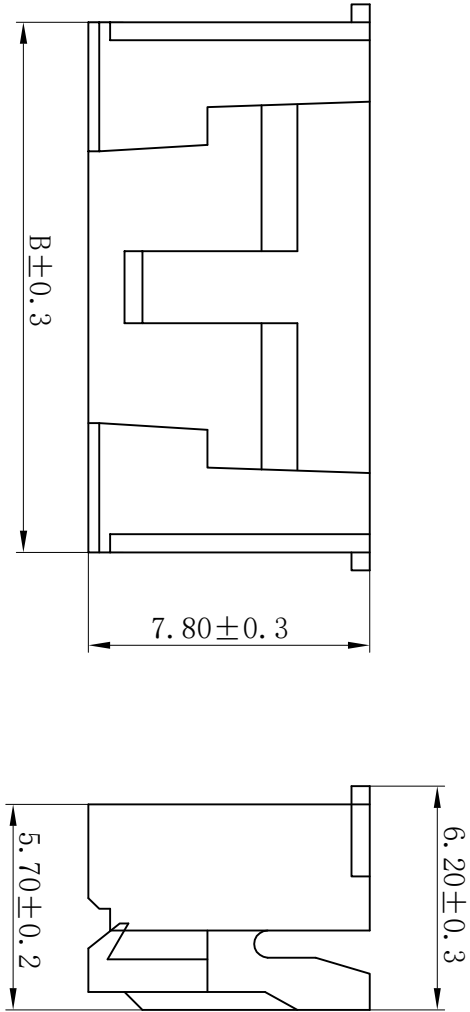

孔位 poles	A	B
2	2.00	4.60
3	4.00	6.60
4	6.00	8.60
5	8.00	10.60
6	10.00	12.60
7	12.00	14.60
8	14.00	16.60
9	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60

浙江乐马电气有限公司 设计 张书晨

尺寸公差	角度公差	品名:	PHS-nY	审核	王佳
.X ±0.25	X.° ±3.0°	图号:	20003-Y	批准	陈其林
.XX ±0.15	.X° ±2.0°	比例:	--	页数:	1/1
.XXX ±0.05	.XX° ±1.0°	单位:	mm	版本:	A