
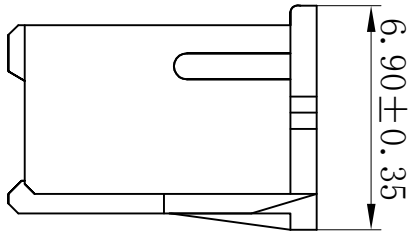
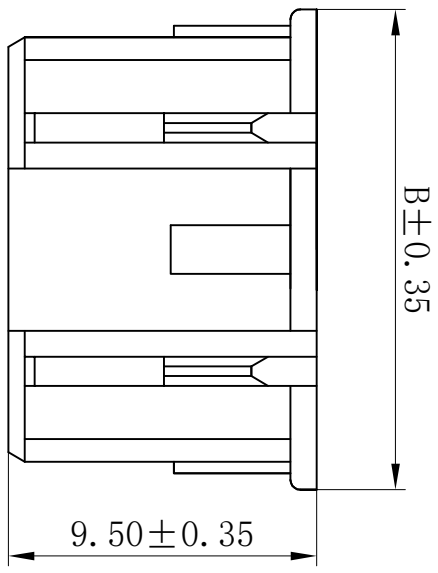


版次	日期	内容

Electrical properties

- Current rating: 3.5A AC\DC
- Voltage rating: 250V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20mΩ max
- Insulation resistance: 1000MΩ min
- Withstanding voltage: 1000V AC/ minute
- Material : Nylon UL94V-0(2)

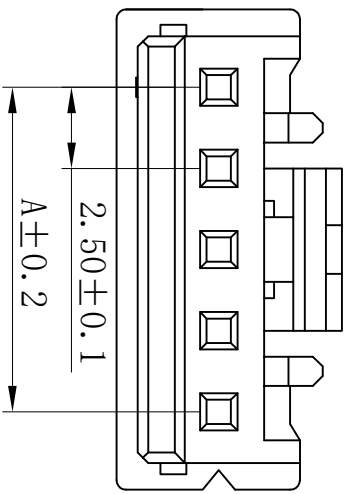

孔位 poles	A	B
2	2.50	7.30
3	5.00	9.80
4	7.50	12.30
5	10.00	14.80
6	12.50	17.30
7	15.00	19.80
8	17.50	22.30
9	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80
-	-	-
20	47.50	52.30

浙江乐马电气有限公司 设计 张书晨

尺寸公差	角度公差	品名:	审核	王佳
.X ±0.25	X.° ±3.0°	XA-nY	批	陈其林
.XX ±0.15	.X° ±2.0°	图号:	批准	
.XXX ±0.05	.XX° ±1.0°	25003-Y	版本:	A
	单位: mm	比例: --	页数: 1/1	